


MODEL NUMBER:

- ❑ **7385.000 Reliant 3 Single Control Centerset**
Metal Speed Connect® pop-up drain. Metal lever handle.
- ❑ **7385.003 Reliant 3 Single Control Centerset**
Indexed metal lever handle. Grid drain. LESS pop-up hole.
- ❑ **7385.004 Reliant 3 Single Control Centerset**
Indexed metal lever handle. LESS drain & pop-up hole.
- ❑ **7385.007 Reliant 3 Single Control Centerset**
Indexed metal lever handle. LESS drain & pop-up rod. With pop-up hole.
- ❑ **7385.008 Reliant 3 Single Control Centerset**
Indexed metal lever handle. Metal Speed Connect pop-up drain.

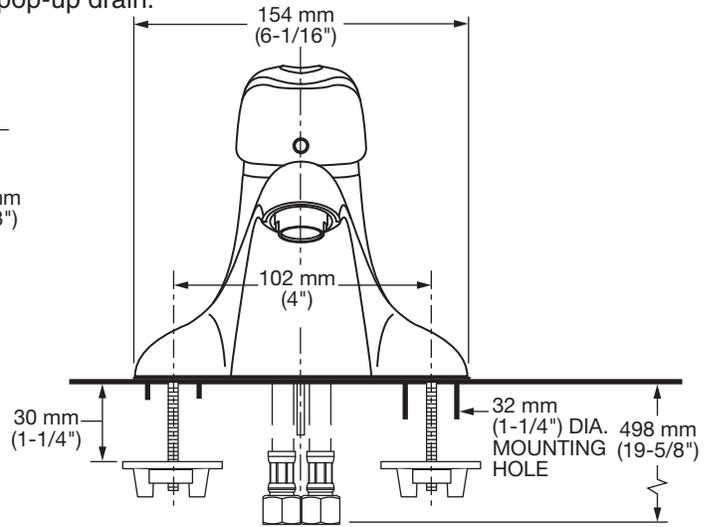

PRODUCT FEATURES:

Cast Brass Waterway with Flexible Supply Hoses:

Strong and durable. Less potential for leaks.

Ceramic Disc Valve Cartridge: Assures smooth, precise valve control and a lifetime of drip-free, maintenance-free performance.

Adjustable Hot Limit Safety Stop: Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.

Exclusive Speed Connect Metal Drain:

- Fewer parts. Installs in less time.
- No adjustments required - seals the first time, every time.
- Flexible stainless steel cable - installs effortlessly in tight spaces.

Lead Free: Faucet contains ≤ 0.25% total lead content by weighted average.

Simple One-Person Installation: Faucet drops in from top. Quick spin nuts secure faucet in place.

GENERAL DESCRIPTION:

All metal body with choice of metal lever, indexed metal lever handle or optional extra long lever handle. Washerless 47 mm ceramic disc valve cartridge with integral hot limit safety stop. Durable cast brass waterway. Braided flexible supply hoses with 3/8" compression connections. 20" (500 mm) long flexible stainless steel drain cable is pre-assembled to faucet body. Metal Speed Connect® drain body (on 7385.000 & 7385.008) with 1-1/4" (32 mm) tail piece. 1.2 gpm/4.5 L/min. maximum flow rate.


SUGGESTED SPECIFICATION

Single control lavatory fitting shall feature an all metal body with metal lever handle. Shall feature a cast brass waterway with flexible hose connections. Shall also feature a washerless ceramic disc valve cartridge with integral hot limit safety stop. Shall also feature a metal drain body with stainless steel cable actuation. Fitting shall be American Standard Model # 7385._____.

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

- ANSI A117.1
- ASME A112.18.1
- NSF 61/Section 9 and Annex G
- CSA B125.1

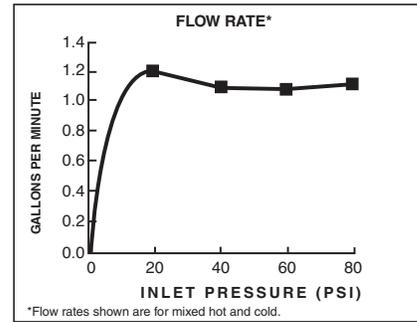

Product Number	Description	Finish Options	
		Polished Chrome	PVD Brushed Nickel
		002	295
7385.000	Reliant 3 Single Control Centerset. Metal lever handle. Metal Speed Connect® pop-up drain.		
7385.003	Reliant 3 Single Control Centerset. Indexed (Red/Blue) metal lever handle. Grid drain. LESS pop-up hole.		
7385.004	Reliant 3 Single Control Centerset. Indexed (Red/Blue) metal lever handle. LESS drain. LESS pop-up hole.		
7385.007	Reliant 3 Single Control Centerset. Indexed (Red/Blue) metal lever handle. LESS drain and pop-up rod. With pop-up hole.		
7385.008	Reliant 3 Single Control Centerset. Indexed (Red/Blue) metal lever handle. Metal Speed Connect pop-up drain.		

Meets the American Disabilities Act Guidelines and ANSI A117.1 Requirements for the physically challenged. *PCA — Pressure Compensating **To modify a product, add suffix after the 4th digit (ex. 2064 F05 101.002) ***Modified product models are NOT WaterSense certified.	7385.000 <ul style="list-style-type: none"> • Metal Lever Handle • Speed Connect® metal drain 	7385.003 <ul style="list-style-type: none"> • Indexed (Red/Blue) metal lever handle • LESS drain, LESS pop-up hole 	7385.004 <ul style="list-style-type: none"> • Indexed (Red/Blue) metal lever handle • LESS drain, LESS pop-up hole 	7385.007 <ul style="list-style-type: none"> • Indexed (Red/Blue) metal lever handle • LESS drain, LESS pop-up rod • With pop-up hole 	7385.008 <ul style="list-style-type: none"> • Indexed (Red/Blue) metal lever handle • Speed Connect metal drain
---	--	--	--	---	--

AERATOR MODIFICATIONS***			Parts Suffix**				
Drain Options	LESS pop-up drain; with hole and pop-up rod	__XPR	___	___	___	___	__XPR
Handle Options	Extra long handle	__LH	__LH	__LH	__LH	__LH	__LH
Flow Control Options	0.5 gpm (1.9 Lpm) PCA* Spray	__F05	__F05	__F05	__F05	__F05	__F05
	Vandal-Resistant 0.5 gpm/1.9 L/min. PCA Aerator	__V05	__V05	__V05	__V05	__V05	__V05
	Vandal-Resistant 1.0 gpm (3.8 L/min.) PCA Aerator	__F10	__F10	__F10	__F10	__F10	__F10
	Vandal-Resistant 1.0 gpm (3.8 L/min.) PCA Aerator	__V10	__V10	__V10	__V10	__V10	__V10
	Vandal-Resistant 1.2 gpm (4.5 L/min.) PCA Aerator	__V12	__V12	__V12	__V12	__V12	__V12
	Vandal-Resistant 1.5 gpm/5.7 L/min. PCA* Aerator	__V15	__V15	__V15	__V15	__V15	__V15
	Non-Aerated Laminar 1.5 gpm/5.7 L/min. PCA Flow Outlet	__L15	__L15	__L15	__L15	__L15	__L15
	Non-Aerated Vandal-Resistant 0.5 gpm/1.9 L/min. PCA Spray	__V05	__V05	See 7382.050	__V05	__V05	__V05
	2.2 gpm/8.3 L/min Aerator	__F22	__F22	__F22	__F22	__F22	__F22