



Finesse™ Quick Install™

Frameless Sliding Bath Door

5305EZ-59

Features

- Frameless
- 1/4" glass
- CleanCoat technology
- Quick Install system
- Interior and exterior towel bars
- Out-of-plumb adjustability
- Tempered glass ensures maximum safety and durability
- Anodized aluminum prevents rusting or corrosion

Installation

- Not for use in hospitality.
- For residential use only.

Included Components

Additional Components:

- Hardware kit
- hex wrench



Codes/Standards

ANSI Z97.1
CPSC 16CFR 1201

STERLING® Warranty - Bath and Shower Doors

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------

DR

N

S

Available Glass Options

Code	Description
------	-------------

Clear


Lake Mist™

1-800-STERLING (1-800-783-7546)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.sterlingplumbing.com.

4-25-2019 22:43 - US/CA

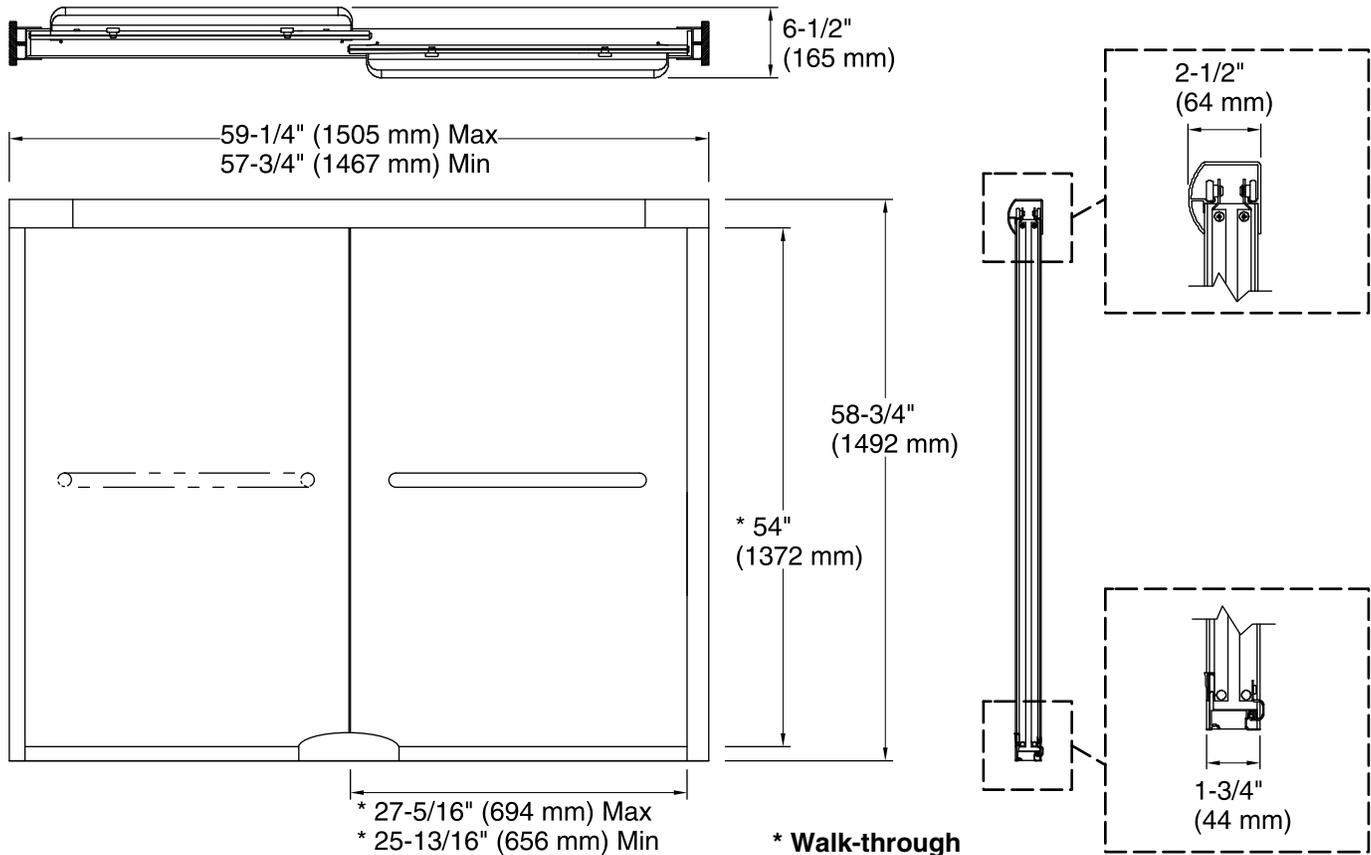

Technical Information

All product dimensions are nominal.

- Installation type: For bath installation
- Opening Width - Min: 57-3/4" (1467 mm)
- Opening Width - Max: 59-1/4" (1505 mm)
- Walk-through - Min: 25-13/16" (656 mm)
- Walk-through - Max: 27-5/16" (694 mm)
- Glass thickness: 1/4" (6 mm)
- Glass coating: CleanCoat®

Notes

- Install this product according to the installation guide.
- The vertical opening should be a minimum of 60-3/4" (1543 mm) to allow for installation clearance.