

FAUCET OPTIONS – CARTRIDGE AND OUTLET.

Delta Faucet's TECK® series of products are designed for demanding commercial applications where robust features are required. Using a building block process, TECK product is built to your specific needs. It's all up to you – cartridge, spout, outlet, handle – you select it, we build it.

Better ideas that mean fewer troubles. We develop product innovations that provide unsurpassed reliability for years of trouble-free performance, like our CER-TECK® and TUF-TECK® cartridges which you'll find at the heart of our two-handle faucets.

TUF-TECK® Compression Cartridge



Double start threads allow majority of flow with first 1/4 turn of operation

Stainless steel screw for durability and long life

Nickel chrome plated brass resists tearing of seat washer

Positive compression shut-off, even in poor water conditions
(Not affected by water pressure)

Spline style broaching for wide handle positioning flexibility


Nickel chrome plated brass ensures long life

All threads are lubricated and outside the waterway, minimizing the potential for lime buildup. All threads are engaged constantly for long life.

Double o-ring seal protects against lime build-up

Nitrile rubber seat washer can be flipped over for extra life

CER-TECK® Ceramic Disc Cartridge

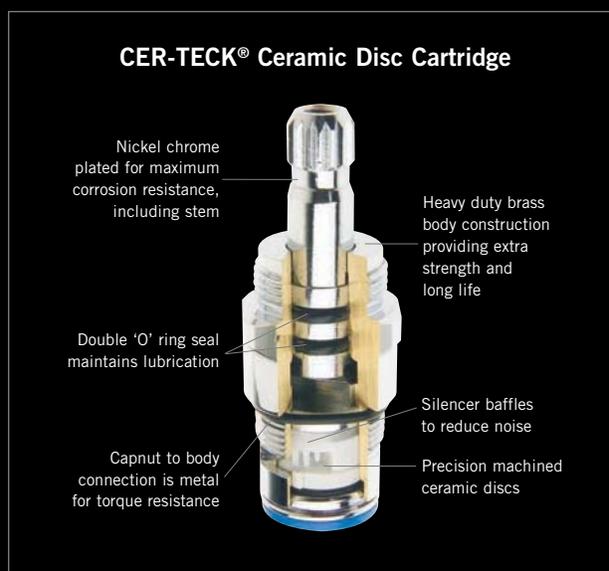

Nickel chrome plated for maximum corrosion resistance, including stem

Heavy duty brass body construction providing extra strength and long life

Double 'O' ring seal maintains lubrication

Silencer baffles to reduce noise

Precision machined ceramic discs

Capnut to body connection is metal for torque resistance

LAMINAR FLOW SMOOTH SPOUT.

- 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa for manual faucets
- 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa or 0.5 gpm @ 60 psi, 1.9 L/min @ 414 kPa for electronic faucets
- Chrome plated smooth end spout
- Maintenance-free laminar flow outlet has flow control in base of spout.



CAREGUARD® OUTLET.

- 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa
- CareGuard outlets offer a unique combination of features including laminar stream, screenless construction and built-in Agion® anti-microbial technology. It's just another example of how we are partnering to take advantage of the latest, most sophisticated technologies to improve our product performance.



Careguard® is a registered trademark of NEOPERL Inc. Agion® antimicrobial technology is a registered trademark of Agion Technologies Inc.

FAUCET OPTIONS – SPOUT.

Finding the right spout for unique installations is never a problem with the Delta® TECK® series. We offer several choices including rigid, swing and limited swing options.




LIMITED SWING GOOSENECK.


Available in two gooseneck variations and multiple sizes, the limited swing gooseneck option uses a solid brass stop to limit movement of the spout to 120° total rotation.

Retrofit the following models with a limited swing spout:

23C6, 23T6, 24T, 25C, 26C3, 26T3, 27C1, 27C2, 27T1, 27T2, 27C4, 27C5, 27T4, 27T5, 27C6 and 27T6.




■ GROUP NO. 1
Regular Gooseneck




■ GROUP NO. 2
Smooth End, Flow Control
in base of Gooseneck Spout
(#7 outlet only)

OPTIONAL SWING SPOUTS.

The TECK series swing spout options vary with more than five solutions to choose from. Swing spouts are available on Group 1 and 2 spouts.

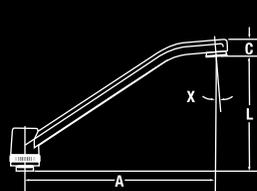

■ GROUP NO. 1
"D" Section Spout

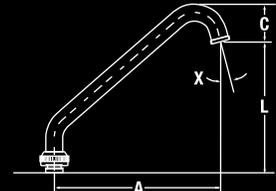

■ GROUP NO. 2
Tubular Spout